

OPTIMIZED FOPID CONTROLLER FOR POWER QUALITY ENHANCEMENT BETWEEN FEEDERS USING INTERLINE DYNAMIC VOLTAGE RESTORER

M.Sarojini Devi^{1*}, Dr.V.Suresh Kumar²

^{1*}Assistant Professor, Department of EEE, Mohamed Sathak Engineering College, Kilakarai,
Tamilnadu

²Professor, Department of EEE, Thiagarajar College of Engineering, Madurai, Tamilnadu

¹devi.saro08@gmail.com, ²vskeee@tce.edu

Abstract-This work presents a novel control scheme for Interline dynamic voltage restorer (IDVR). The optimized fractional order PID (FOPID) controller is used in this work for power quality enhancement such as voltage regulation, harmonics distortion reduction, voltage sag and swells compensation, fault compensation etc. The gain parameters of FOPID controller are tuned by gravitational search algorithm (GSA). The performance of the proposed controller is evaluated by comparing it with other optimization technique such as particle swarm optimization and cuckoo search optimization algorithm. The simulation results show that FOPID with GSA performs better than the other techniques in terms of power quality enhancement.

Introduction

Nowadays PQ problems are increased due to the increase in non-linear loads such as induction motor, inverter etc. In order to maintain the supply of quality power, a balanced sinusoidal voltage is needed [1]. This is achieved by compensators. Conventionally, the compensation is carried out by using bulk capacitors. But the design of capacitor values required for compensation is a critical issue when using bulk capacitor. Hence power conditioners such as STATCOM, DVR, UPFC, UPQC etc., are used [2]. A DVR compensate voltage distortion in feeder by injecting series with the voltage feded. This is series compensation. DVR may be placed in adjacent feeders with common DC bus [3]. This is called Interline Dynamic voltage restorer (IDVR). IDVR controls the power flow for the entire line. IDVR comprises of two DVRs. Each DVR is connected to the separate power line through common DC link. The main objective of IDVR is reactive and real power compensation thereby mitigates voltage sag [4]. The DVR may be a voltage source converter (VSI) or current source converter (CSI). The VSI or CSI is controller by controllers. Many literatures reports proportional integral (PI) controller as the control system for compensating voltage [5-7]. The PI controller compares the actual load voltage and the reference voltage.

The PI controller generates the required modulation index (MI) depends on error between actual and desired load voltage. This MI is then compared with PWM generator. The PWM generator generates the gate pulses as required by VSI or CSI. The inverter injects the compensation voltage through the transformer and filter. The filter is to mitigate the harmonics. The main limitations of PI controller are the tuning of gain values and design. The standard PID controller is improved to a form based on fractional order calculus called FOPID controller [8]. The FOPID controller outperforms conventional PID controller in terms of control performance. This improvement in performance is due to the introduction of fractional order term λ and μ [9]. Even though the FOPID controller has many advantages over conventional PID controller, the extra terms in FOPID controller makes the tuning process more difficult. The tuning of FOPID parameters is very important since it decides the steady state and transient performance, stability and robustness. To alleviate the issue of tuning FOPID controller, many researchers proposed analytical methods and optimization methods [10]. In conventional analytical methods, the process of tuning is complex for large system. Hence evolutionary based optimization algorithms like Genetic algorithm (GA), Particle Swarm Optimization (PSO) algorithm, Differential Evolution (DE), Ant colony optimization algorithm (ACO) etc. are used [11-13].

In this work, the FOPID controller is used for real and reactive power compensation using IDVR. The gravitational search algorithm is used as an optimization algorithm for tuning the FOPID controller.

Methodology:

IDVR

IDVR is connected in series with the lines. It comprises of two DVRs connected through common DC link. The voltage sag is mitigated in distribution line by real and reactive power compensation. Of two DVR, one DVR mitigates the voltage sag in the line from the DC link voltage, while other DVR stock up the consumed energy through second distribution line. Hence voltage sags of high value also able to compensate by IDVR. The schema of IDVR is shown in Figure. This IDVR consists of two DVRs connected to two feeders of different rating. Of the two DVR, one DVR responsible for mitigating voltage sag and the other DVR compensates the DC link voltage reduced due to real power compensation taking for mitigating voltage sag. Voltage sag is more prominent in transmission system than in the distribution system. In this proposed work, it is assumed that the feeder 1 have more

impact of voltage sag than feeder 2. Hence DVR1 operates for voltage sag compensation and DVR2 compensates for real power compensation.

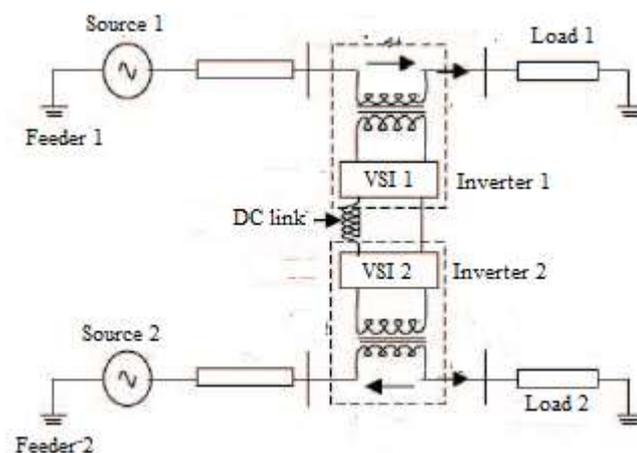


Fig. 1 Schematic diagram

FOPID controller

Fractional order controllers are working based on the fractional calculus. The Conventional PID controller based on fraction calculus is called FOPID controller. The integral and derivatives in PID controller may be any real number in fractional calculus. The FOPID controller is designated as $PI^\lambda D^\mu$. The function is defined as,

$$u(t) = K_p e(t) + K_i \left(\frac{de(t)}{dt} \right)^\lambda + K_d \left(\frac{de(t)}{dt} \right)^\mu \quad (1)$$

In FOPID controller, there is five degree of freedom i.e. five parameters such as $(K_p, K_i, K_d, \lambda, \mu)$ needs to be designed inorder to obtain reliable controller function. In those parameters, λ and μ is not an integer. Hence proper selection of those parameters is critic in controller design. In this work, the FOPID controller parameters are optimized by using GSA.

Gravitational search algorithm (GSA)

GSA is meta heuristic optimization algorithm based on the Newtonian law of gravitation. The particles are the objects having different masses [14]. Each particle having different masses. The particle with heaviest mass is considered as an optimal solution. The force of attraction between particles is directly proportional to masses and inversely proportional to the square of the distance between them. The parameters in this algorithm are

position of the article,, inertial mass and gravitational mass. The heaviest mass particle moves slowly than lighter one. The velocity of the particle is calculated by using inertial and gravitational mass. The velocity is updated using fitness function. The algorithm reaches an optimal solution by adjusting the gravitational and inertial mass. The heaviest mass particle which is the optimal solution attracted all other lighter particles in the search space. The algorithm for the GSA algorithm is shown below:

Algorithm:

Step 1:

Initialization of particles i.e. masses

The position is randomly assigned as follows

$$X_n = x_n^1, x_n^2, \dots, x_n^d$$

where $n = 1, 2, 3, \dots, N_p$

X_n^d is the n^{th} particle position in d dimensional space

N_p is the Total number of particles

Step 2:

Calculate the fitness function for all particles and also found the best and worst solution.

The function used in this work is minimization of error in FOPID controller. Therefore the fitness function is Integral square error (ISE). The fitness function is minimization function.

$$F = \int (e(t))^2 dt \tag{2}$$

F is the Fitness function ISE.

$best(iter) = \min(F)$, best F

$worst(iter) = \max(F)$, worst F

Step 3:

Calculation of gravitational constant $G(iter)$

$$G(iter) = G_0 \exp\left(-\alpha \frac{iter}{iter_{max}}\right) \quad (3)$$

where $G_0=100$ and $\alpha=20$

Step 4:

Calculation of mass of particles

$$S_i(iter) = \frac{F_i(iter) - worst(iter)}{best(iter) - worst(iter)} \quad (4)$$

$$Mass(iter) = \frac{S_i(iter)}{\sum_{j=1}^N S_j(iter)} \quad (5)$$

Step 5:

Calculate acceleration of particles based on law of gravity and Newton second law of motion

$$acc(iter) = \sum_{j \in nbest} rand_j G(iter) \frac{Mass_j(iter)}{R_{ij}(iter) + \varepsilon} (x_j - x_i) \quad (6)$$

$j=1,2,\dots,N_p$

$$R_{ij} = \|X_i(iter), X_j(iter)\|$$

where,

acc is acceleration

$rand_j$ is random variable [0,1]

ε

is the constant

R_{ij} is the Euclidean distance

$nbest$ is the first n number of particles with best fitness

n_{best} varies from n_0 to 1

n_0 is the initial value

Step 6:

Calculate velocity and update particles position

$$vel_{new} = rand(1) \times vel_{old} + acc(iter) \quad (7)$$

$$x_{new} = x_{old} + vel_{new} \quad (8)$$

Repeat steps 2-6 until stopping criteria is reached

The final updated position with best fitness is the global optimal solution. The GSA and PSO both have compromise characteristics to solve the complex non linear problems. Exploitation is the major difference between PSO and GSA. PSO has exploitation based on gbest. GSA has its local exploitation capability.

Results and Discussion

The two line IDVR is simulated in MATLAB/Simulink. The parameters of the simulation is shown in Table 1. The simulink diagram is shown in Fig. 2

Table 1. Simulation Parameters

Parameter	Feeder 1	Feeder 2
Source Voltage	415 V	415 V
Load resistance	50Ω	50 Ω
Load inductance	100 mH	100 mH
Filter resistance	0.5 Ω	0.5 Ω
Filter inductance	1 mH	1 mH
DC link capacitance	4700 μF	4700 μF
DC link voltage	1200 V	1200 V

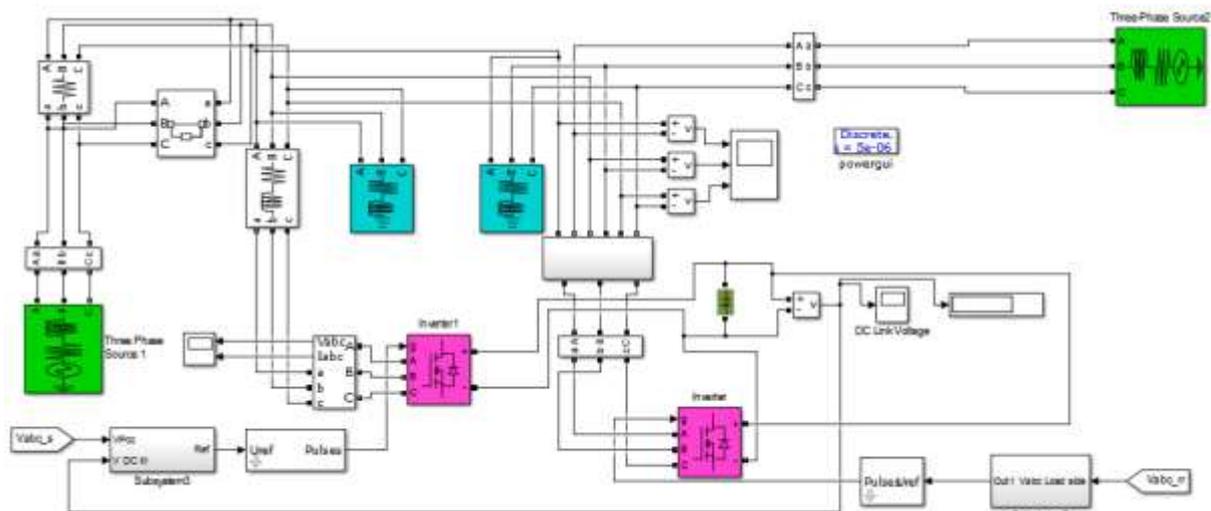


Fig. 2 Simulation diagram

Fig. 3 shows the source voltage and source current with 75% sag at 0.5 s. The corresponding DC link compensating voltage is shown in Fig. 4. The FOPID controller compensates the load voltage at the instant voltage sag happens. The power quality is also ensured using this controller. The power factor and THD of source current is shown in Fig. 5 and Fig. 6, respectively. The power flow between the source and the load is also shown in Fig. 7. In order to prove the effectiveness of the proposed algorithm, a comparison is made between PSO and GSA as shown in Table 2. From the Table 2, it clearly reveals that the GSA based FOPID controller works efficiently on the IDVR system with minimum error.

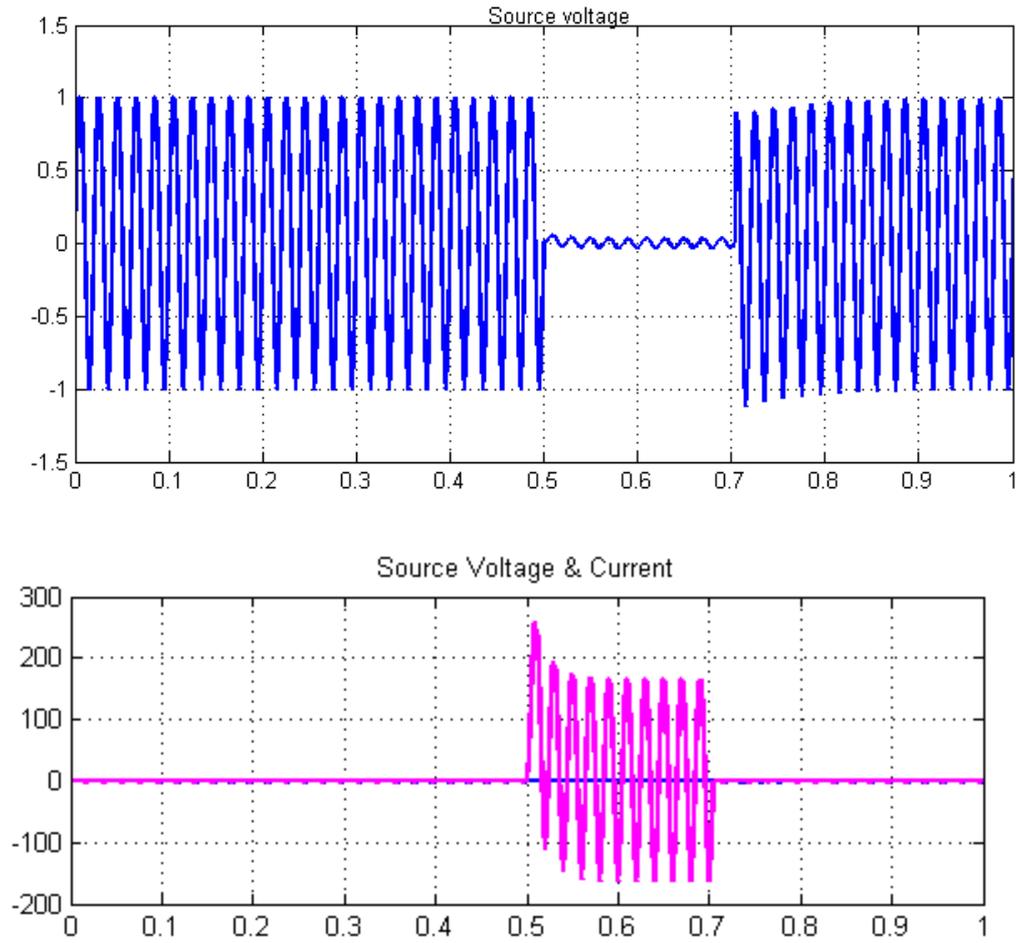


Fig. 3 Source voltage and Source current with sag

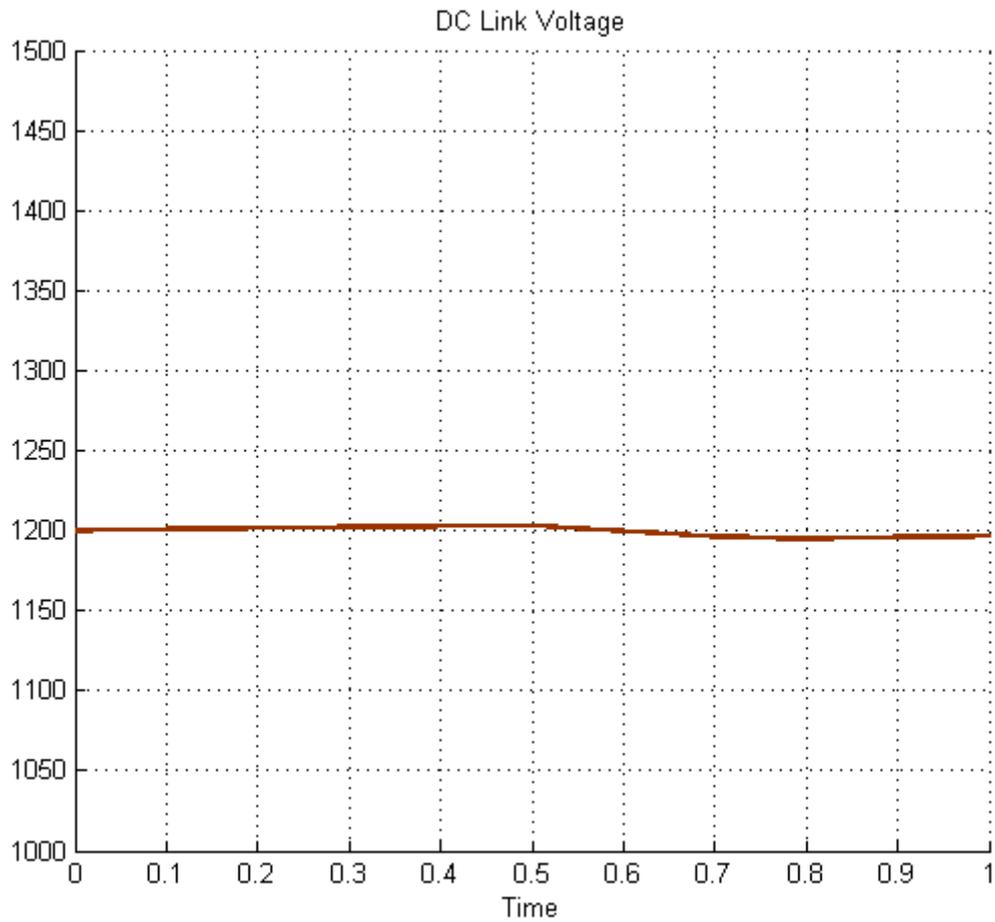


Fig. 4 DC link voltage

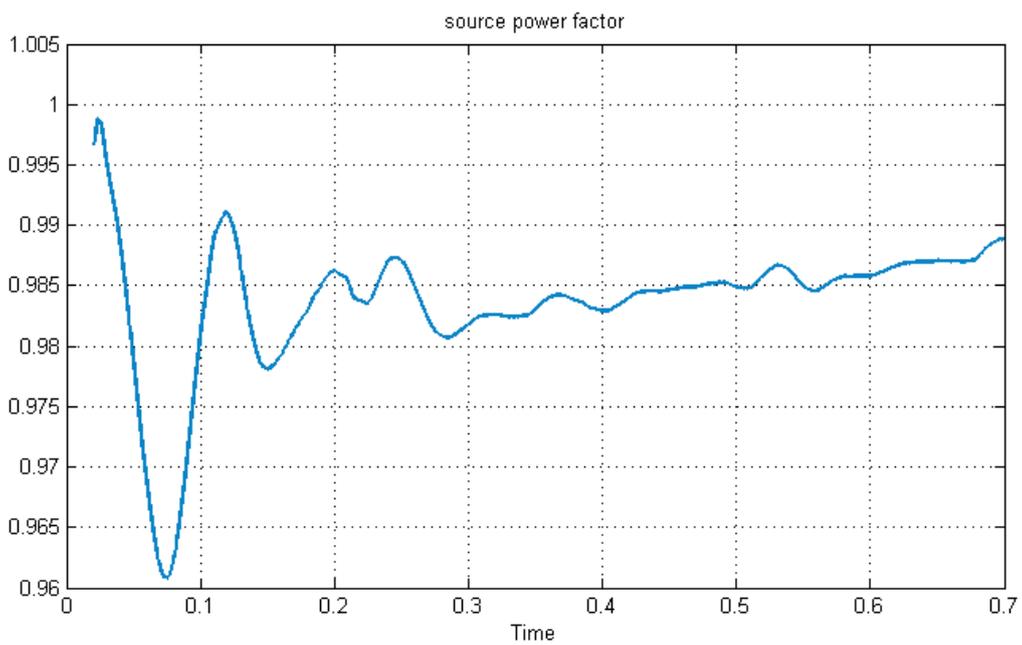


Fig. 5 Power Factor

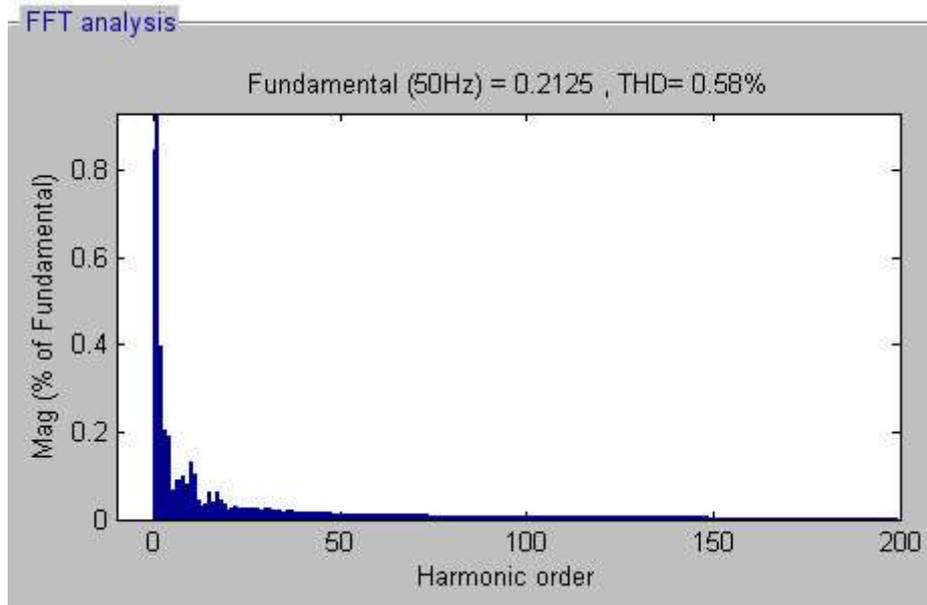


Fig. 6 THD of source current

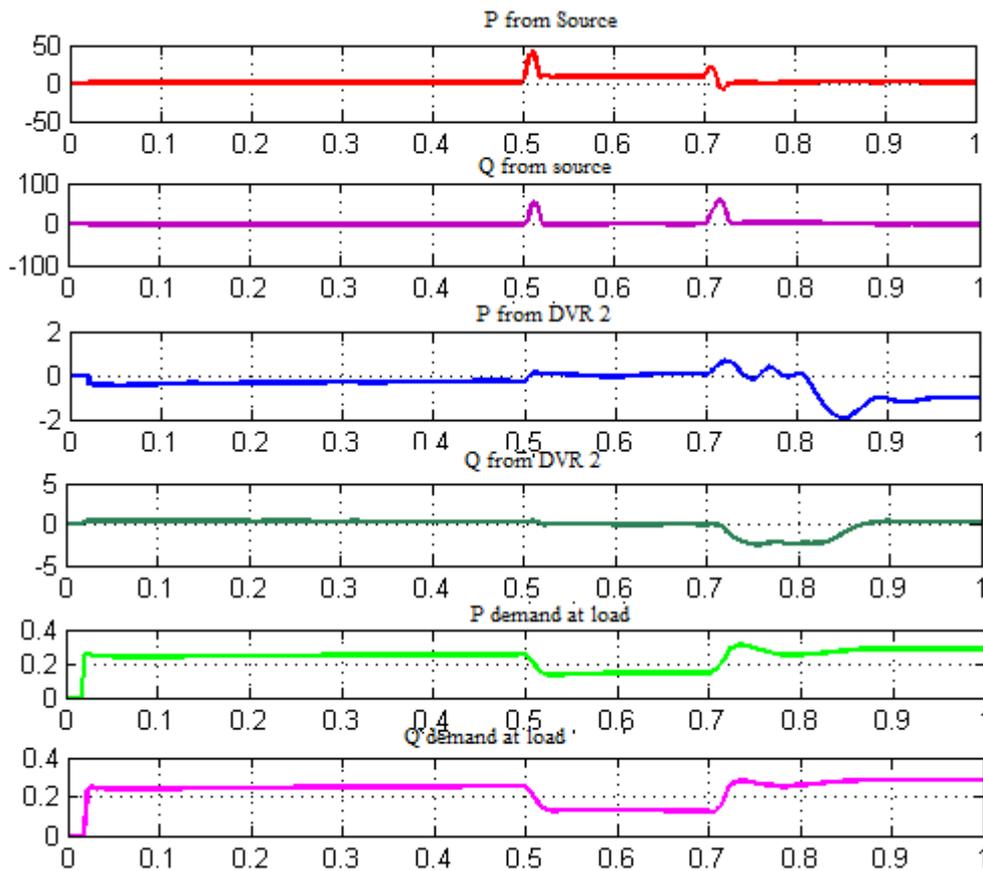


Fig. 7 Power Flow

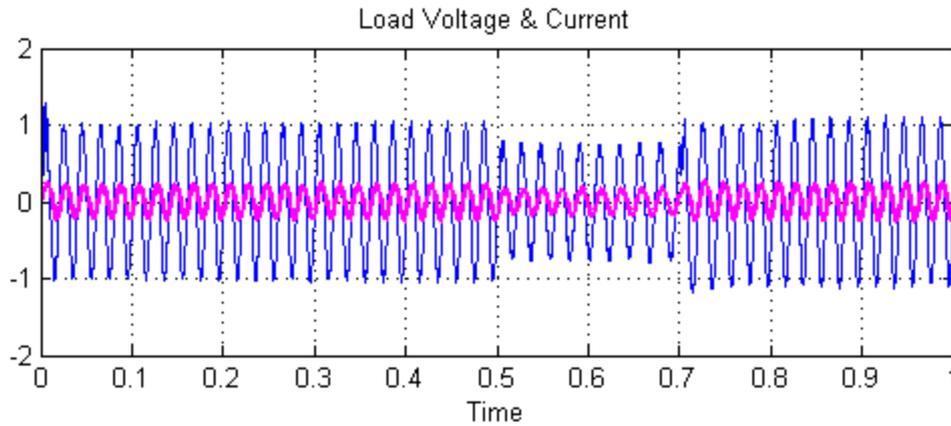


Fig. 8 Compensated load voltage

Table 2 Comparison between PSO and GSA

Performance indices	PSO	GSA
$[K_p, K_i, K_d, \lambda, \mu]$	[109.7, 0.86, 1.76, 0.46, 0.97]	[101.2, 0.67, 2.32, 0.12, 0.78]
ISE	1.0868	0.7578
ITSE	2.7589	1.6289

Conclusion:

A novel control scheme for Interline dynamic voltage restorer (IDVR) is proposed based on optimized FOPID controller. The IDVR is modelled using two DVR system. The FOPID controller parameters are optimized using GSA with ISE and ITSE as the performance indices. The performance of the proposed controller is evaluated by comparing the performance indices based on PSO algorithm. The GSA algorithm compensates the voltage sag with power quality enhancement.

References:

- [1] Ray Arnold, "Solutions to Power Quality Problems" power engineering Journal, Volume: 15; Issue: 2 April 2001, pp: 65-73.
- [2] Ghosh A, Ledwich, G, "Power Quality Enhancement Using Custom Power Devices" Kluwer Academic Publishers: New York, 2002.

- [3] Li GJ, Zhang XP, Choi SS, Lie TT, Sun YZ, "Control Strategy for Dynamic Voltage Restorers to Achieve Minimum Power Injection Without Introducing Sudden Phase Shift" IEE Proceedings-Generation Transmission and Distribution 2007; 1(5):847–853.
- [4] Vilathgamuwa DM, Wijekoon HM, Choi SS. A novel technique to compensate voltage sags in Multi-line distribution system-The interline dynamic voltage restorer. IEEE Transactions on Power Electronics 2006; 53(5):1603–1611.
- [5] D. Mahinda Vilathgamuwa, H. M. Wijekoon and S. S. Choi, "Interline Dynamic Voltage Restorer: A Novel and Economical Approach for Multiline Power Quality Compensation" IEEE Trans. Industry applications, Vol. 40, No. 16, pp. 1678-1685, Dec. 2004.
- [6] Ajaei FB, Afsharnia S, Kahrobaeian A, Farhangi S (2011) A fast and effective control scheme for the dynamic voltage restorer. IEEE Trans Power Deliv 26(4):2398–2406.
- [7] Shahabadini M, Iman-Eini H (2016) Improving the performance of a cascaded H-bridge-based interline dynamic voltage restorer. IEEE Trans Power Deliv 31(3):1160–1167.
- [8] M. F. Tolba, B. M. AboAlNaga, L. A. Said, A. H. Madian and A. G. Radwan, "Fraction order integrator/differentiator: Fpga implementation and fopid controll application", AUE-International Journal of Electronics and Communication, vol. 98, pp. 220-229, 2019.
- [9] AboBakr, L.A. Said, A.H. Madian, A.S. Elwakil, A.G. Radwan Experimental comparison of integer/fractional-order electrical models of plant AEU-Int J Electron Commun, 80 (2017), pp. 1-9
- [10] Hybridized abc-ga optimized fractional order fuzzy pre-compensated fopid control design for 2-dof robot manipulator ,AEU-Int J Electron Commun, 79 (2017), pp. 219-233
- [11] Castillo O, Valdez F, Soria J, Amador-Angulo L, Ochoa P, Peraza C (2019) Comparative study in fuzzy controller optimization using bee colony, differential evolution, and harmony search algorithms. Algorithms 12(1):9

- [12] S. Singh, V. P. Singh, R. K. Dohare, S. P. Singh and S. K. Jain, "Optimal PID controller design for level control of three tank system", *Int. J. Adv. Technol. Eng. Explor.*, vol. 4, no. 26, pp. 1-5, 2016.
- [13] Singh C. Genetic algorithms based PID controller design. *IJEDR*. 2015; 3, ISSN: 2321-9939.
- [14] Dowlatshahi M.B., Nezamabadi-pour H., Mashinchi M,"A **discrete gravitational search algorithm for solving combinatorial optimization problems** *Inform. Sci.*, 258 (2014), pp. 94-107